



Company name	WOSPerformance
Reference number	
Part	70A Dynator
Manufacturer	WOSP
Nominal current [A]	70A

**PASS**


### Test results table

Parameter	Value	Reference
Output at low revolutions	33 A	
Maximum output power	922 W	
Max output current	72 A	
Ripple	3 A	
Leakage	<5mA	
Maximum efficiency	37 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	1086 rpm	
Motor power	2.5 kW	
Torque	7.1 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	0.7 V	
Status light RPM	300 rpm	
VSP @2,500	14.4 V	
VSP @4,250	14.3 V	
VSP @6,000	14.4 V	
Duration of the procedure	43.7 s	
Three-phase voltage	405.5 V	

### Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

### Activity chart

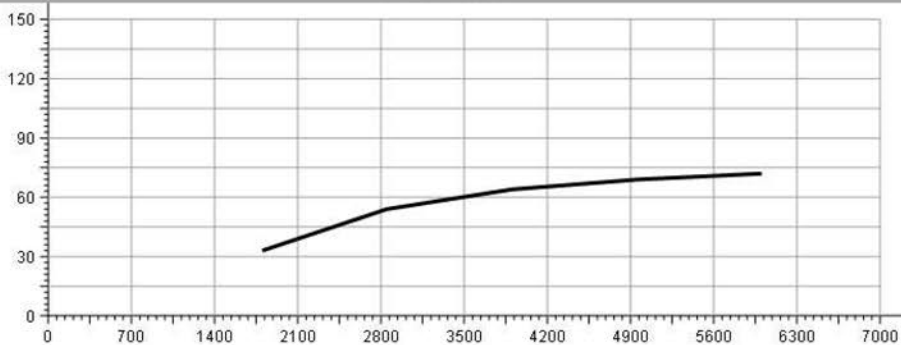

### Data

[RPM]	Current [A]	Reference [A]
6003	72	
4959	69	
3900	64	
2848	54	
1800	33	